



Horizontal Tension Testing Machine



This is a horizontal type tension tester for wire rope, manila rope and chain.

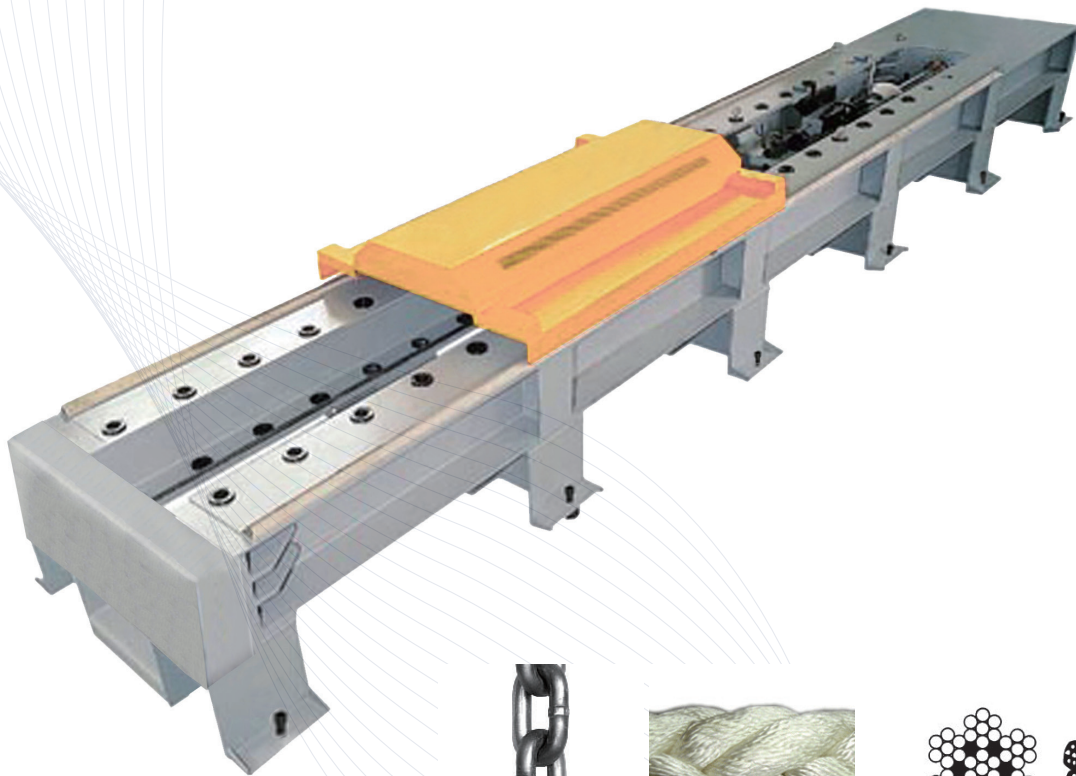

Model		QRHZ-S11	QRHZ-S13	QRHZ-S15	QRHZ-S110
Max. Load Capacity (MN)		1	3	5	10
Min. Load Capacity (N)		20	60	100	200
Accuracy		Within ± 0.5 % of the indicated load			
Operation Type		Servo valve			
Test Speed		1 ~ 100 mm/min			
Test Control		Load, stroke, strain			
Load Sensor		Pressure cell or load cell			
Testing Speed Control		Manual, computer			
Safety Device		Micro limit switch			
	Tensile Test Space (mm)	1 000			
	Grip for Rods (mm)	Ø10 ~ Ø25	Ø20 ~ Ø50		Ø20 ~ Ø80
Pump		Piston pump			
Cross Head Motor (kW)		1.5	2.25	3.75	5.25
Pump Motor (kW)		1.5	3.75	7.5	11.25
Power		3P, AC 220 V or 380 V, 60 Hz			
Power Consumption (kW)		2	4	7	10
Load Dimension (mm)		1 500 × 12 000 × 800	1 500 × 15 000 × 900	1 500 × 15 000 × 900	2 000 × 15 000 × 1 200
Weight (kg)		10 000	15 000	20 000	30 000